

# DHI-VTH8A21KMS-CW

Digital Indoor Monitor



- · Elegant all-screen design
- 7" capacitive touchscreen, 1024 × 600
- Built-in Android OS and flat UI design
- Used with the door station, master station and platform to form a intercom system
- House-to-house visible communication(with camera)
- 6-channel alarm input and 1-channel alarm output












<b>Technical Specificati</b>	on
System	
Main Processor	Embedded processor
Operating System	Android 8.1
Network Protocol	IPv4; TCP; SIP; UDP; RTSP
Video	
Video compression	H.264
Image Sensor	1/2.9" 2MP CMOS
Lens	2mm
Angle of View	D:84.5° H:73.5° V:58.4°
Basic	
Screen Type	7" full-color TFT
Resolution	1024 (H) × 600 (V)
Audio Compression	G.711a; G.711u; PCM
Audio Input	1–ch omnidirectional microphone
Audio Output	Built-in speaker
Audio Mode	Two-way voice call
Audio Bit Rate	16 kHz, 16 bit
Function	
Communication Mode	Full digital
Information Release	Receive and view information released by the management center
DND Mode	Do not disturb period can be set.

Number of Extensions	Villa: 9 Apartment: 4 Wi-Fi intercom: 1 main monitor, 2 extension monitors	
Wi-Fi	Yes	
Performance		
Casing	Alluminum+ ABS	
Port		
Alarm Input	6	
Alarm Output	1	
Network Port	RJ-45 port, 10/150 Mbps self-adaptive	
Alarm		
SOS	Yes	
General		
Appearance Color	Silver	
Power Supply	12–24 VDC, 1 A; Standard PoE	
Power Adapter	Not Standard	
Installation	Surface	
Accessory	Surface mount bracket: Included Alarm ribbon cable: Included Power cord: Included RS-485 and power output ribbon cable: Included SD card: Optional (<64G)	
Product Dimensions	185 mm × 147 mm × 23.3 mm (7.28" × 5.79" × 0.92")	
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)	
Operating Humidity	10%–90% (RH), non-condensing	
Power Consumption	≤1 W (standby), ≤6 W (working)	
Gross Weight	0.41 kg (0.90 lb)	


## **Ordering Information**

Туре	Model	Description
Indoor	DHI-VTH8A21KMS-	Android 7-inch digital indoor monitor DHI-
Monitor	CW	VTH8A21KMS-CW

### Installation

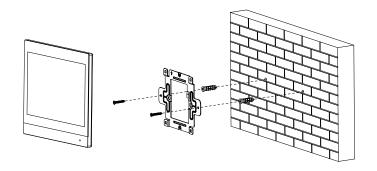

### Dimensions (mm[inch])

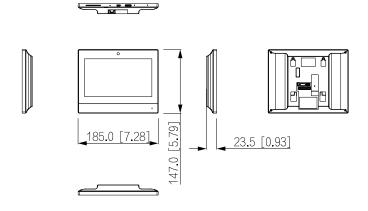

### **Application**

